
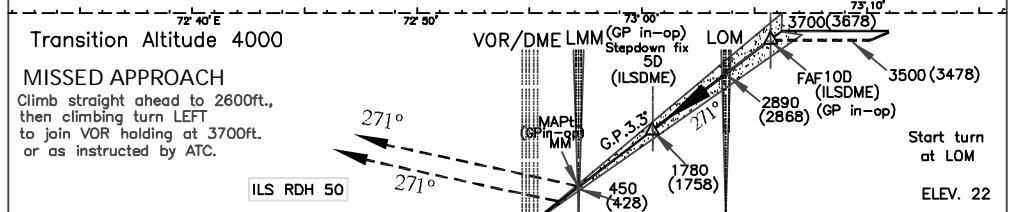


INSTRUMENT APPROACH CHART
 AERODROME ELEV. 37ft. HEIGHTS RELATED TO THR RWY 27-ELEV.22ft
 APP.127.9 TWR.118.1
 MUMBAI INDIA ILS(X) RWY 27

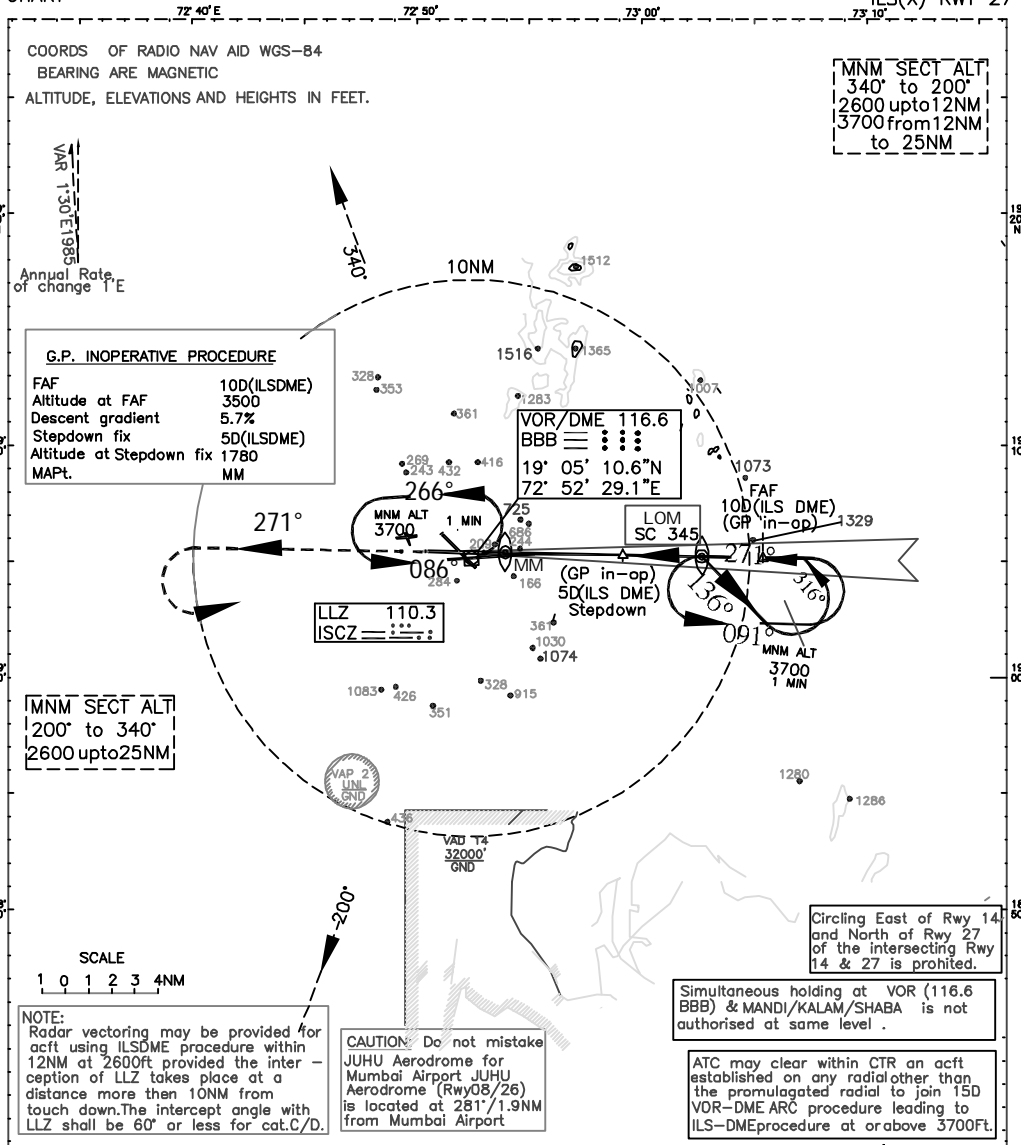

NAUTICAL MILES FROM THR RWY 27 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20

O C A (H)				Distance (ILS DME)/Altitude information for G.P.inoperative procedure																	
CAT. OF AIRCRAFT	A/B	C	D	Distance(NM)	10D	9D	8D	7D	6D	5D(SD)	4D	3D	2D								
STRAIGHT-IN	230(208)	230(208)	230(208)	Altitude (ft.)	3500	3140	2800	2450	2100	1780	1410	1070	720								
VISUAL CIRCLING	1380(1343)	1480(1443)	1700(1663)	Rate of Descent /Ground speed information (G.P.in-op. procedure)																	
G.P.inoperative procedure				Ground speed (kt.)																	
STRAIGHT-IN	540(518)	540(518)	540(518)	Rate of descent (ft/min)																	
VISUAL CIRCLING	1380(1343)	1480(1443)	1700(1663)	80 100 120 140 160 180 460 575 695 810 925 1040																	

AERODROME OPERATING MINIMA	CATEGORY A		CATEGORY B		CATEGORY C		CATEGORY D	
	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT
NORMAL MINIMA (ILS)	800(550)	1200	800(550)	1200	800(550)	1200	800(550)	1200
RESTRICTED MINIMA (ILS)	1000	1500	1000	1500	900(650)	1300	900(650)	1300
NORMAL MINIMA (GP INOP)	1600	2400	1600	2400	2000	2800	2800	3600
RESTRICTED MINIMA (GP INOP)	2000	2800	2000	2800	2800	3600	3200	4000
NORMAL CIRCLING MINIMA		3600		3600		5000		5000
RESTRICTED CIRCLING MINIMA		3600		3600		5000		5000

DRG. NO. AAI/09-IALC/02/15.05.06