



INSTRUMENT APPROACH CHART
 AERODROME ELEV. 1041ft.
 HEIGHTS RELATED TO THR RWY 24-ELEV.1038ft
 RAIPUR INDIA
 ILS RWY 24 (Cat.A/B&C)
 TWR.122.3

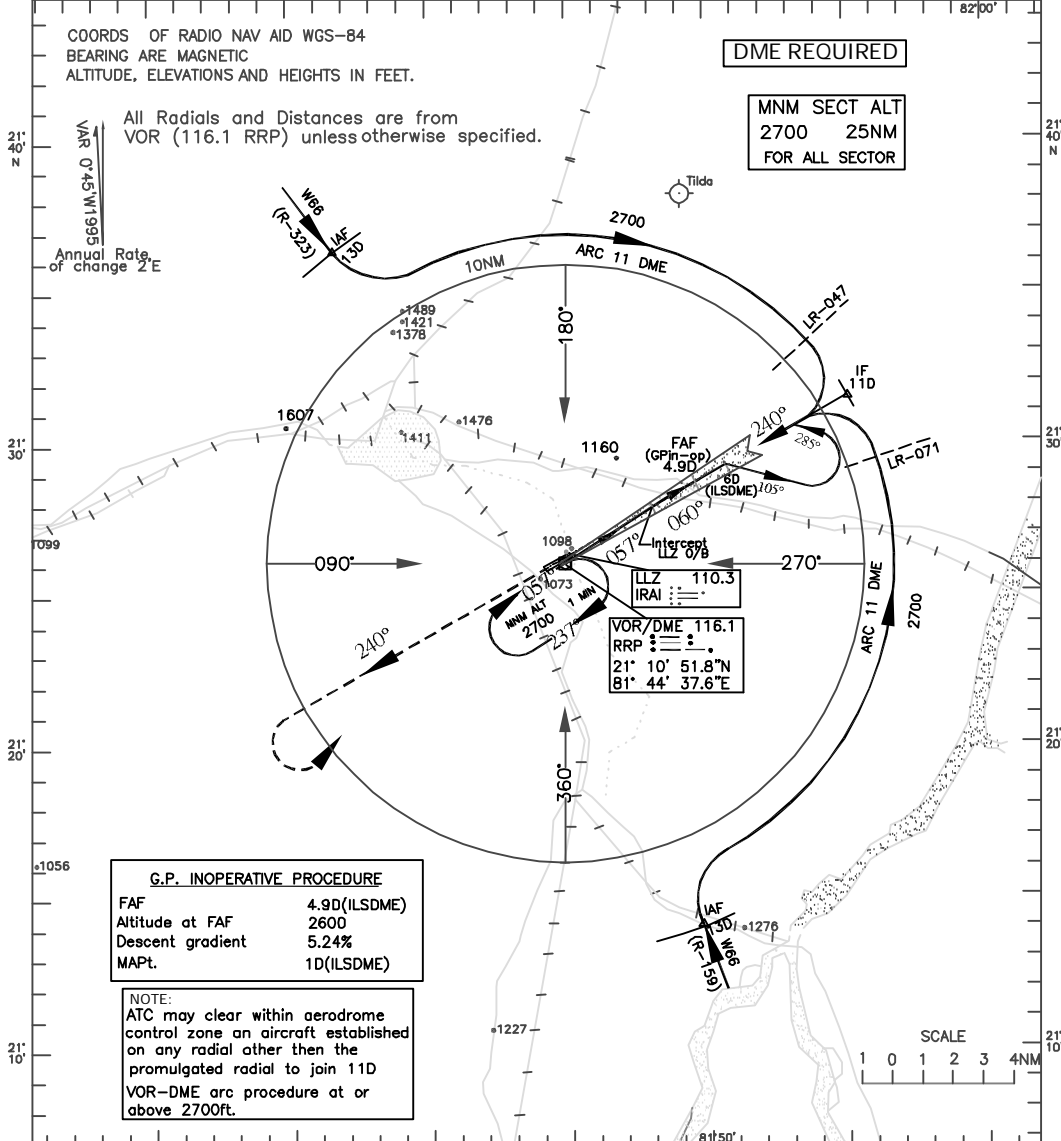

G.P. INOPERATIVE PROCEDURE

FAF 4.9D (ILSDME)
 Altitude at FAF 2600
 Descent gradient 5.24%
 MAPt. 1D (ILSDME)

NOTE:
 ATC may clear within aerodrome control zone an aircraft established on any radial other than the promulgated radial to join 11D VOR-DME arc procedure at or above 2700ft.

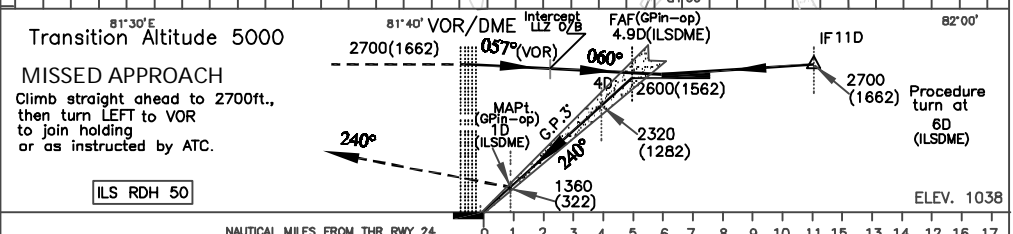

CAT. OF AIRCRAFT	O C A (H)		Distance (ILS DME)/Altitude information for G.P.inoperative procedure					
	A/B	C	Distance(NM)	4.9D	4D	3D	2D	
STRAIGHT-IN	1260(222)	1260(222)		2600	2320	2000	1680	
VISUAL CIRCLING	1530(489)	1630(589)						
G.P.inoperative procedure			Distance from FAF to MAPt: 3.9D					
STRAIGHT-IN	1440(402)	1440(402)	Ground speed (kt.)	80	100	120	140	160
VISUAL CIRCLING	1530(489)	1630(589)	Rate of descent (ft/min)	425	530	635	745	850
AERODROME OPERATING MINIMA	CATEGORY A		CATEGORY B		CATEGORY C			
	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT		
NORMAL MINIMA (ILS)		1200		1200		1200		
RESTRICTED MINIMA (ILS)		1700		1700		1300		
NORMAL MINIMA (GP INOP)		2400		2400		2800		
RESTRICTED MINIMA (GP INOP)		2800		2800		3200		
NORMAL CIRCLING MINIMA		3600		3600		3600		
RESTRICTED CIRCLING MINIMA		3600		3600		4000		

DRG. NO. AAI/11-IALC/07/12.07.07
 Cancellation: G-0092/06&AIP SUPPL.NO.23/2006