INSTRUMENT APPROACH CHART

AERODROME ELEV. 777ft.

HEIGHTS RELATED TO THR RWY 10 ELEV.719ft

APP.127.9
TWR.118.1

DELHI
INDIA
ILS RWY 10

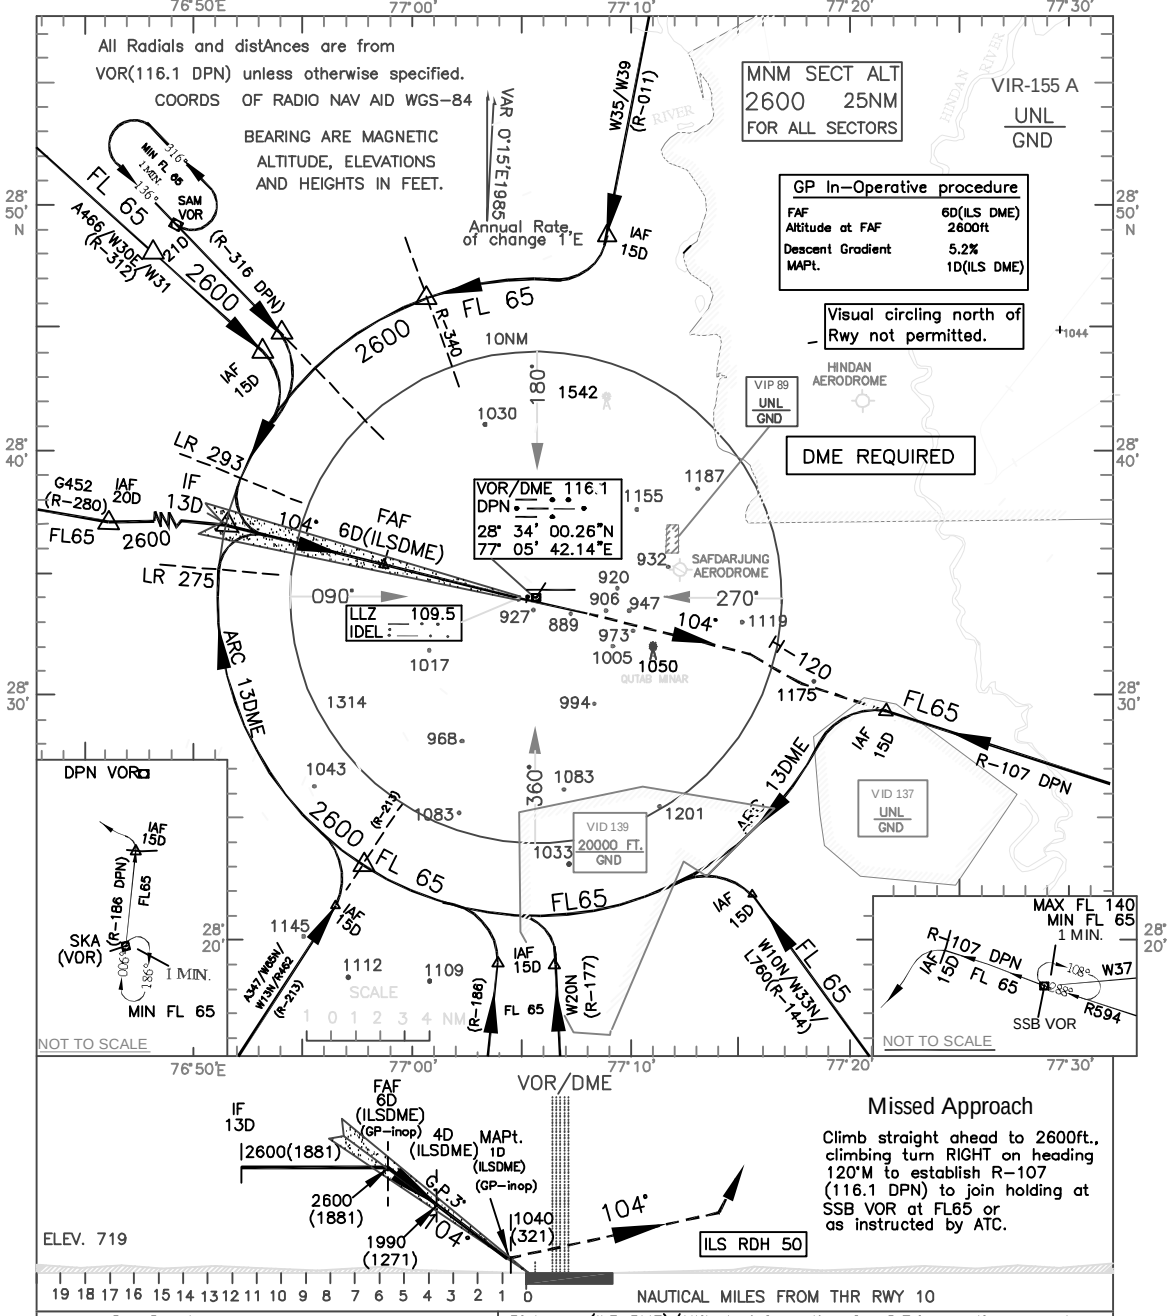

Missed Approach

Climb straight ahead to 2600ft., climbing turn RIGHT on heading 120°M to establish R–107 (116.1 DPN) to join holding at SSB VOR at FL65 or as instructed by ATC.

O. C. A.			Distance (ILS DME)/Altitude information for G.P.inoperative procedure						
CATEGORY OF AIRCRAFT	A/B	C/D	Distance(NM)	6	5	4	3	2	
STRAIGHT–IN	970	990	Altitude (ft.)	2600	2300	1990	1670	1360	
VISUAL CIRCLING	1470	1570	Rate of Descent /Ground speed information						
G.P.Inoperative procedure			DISTANCE FROM FAF to MAPt : 5 NM						
STRAIGHT–IN	1120	1120	Ground speed (kt.)	80	100	120	140	160	180
VISUAL CIRCLING	1470	1570	Time (Min:Sec)	3:45	3:00	2:30	2:08	1:52	1:40
			Rate of descent (ft/min)	420	525	630	735	845	950

AERODROME OPERATING MINIMA	CATEGORY A		CATEGORY B		CATEGORY C		CATEGORY D	
	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT
NORMAL MINIMA (ILS)	900	1300	900	1300	900	1300	900	1300
RESTRICTED MINIMA (ILS)	1500	1900	1500	1900	1300	1700	1300	1700
NORMAL MINIMA (GP INOP)	2000	2400	2000	2400	2400	2800	2800	3200
RESTRICTED MINIMA (GP INOP)	2400	2800	2400	2800	2800	3200	3200	3600
NORMAL CIRCLING MINIMA		3600		3600		4400		4800
RESTRICTED CIRCLING MINIMA		3600		3600		5000		5000

DRG. NO. AAI/05–IALC/04/15.05.06