
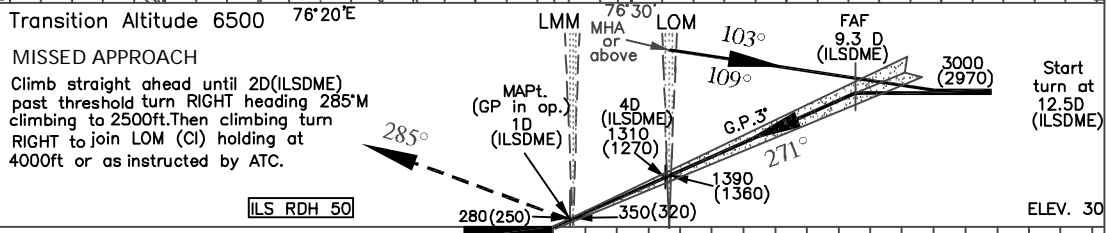


INSTRUMENT
APPROACH
CHART
AIP INDIA

AERODROME ELEV. 30ft.
HEIGHTS RELATED TO
THR RWY 27-ELEV.30ft

COCHIN INTERNATIONAL
INDIA
ILS(Y) RWY 27

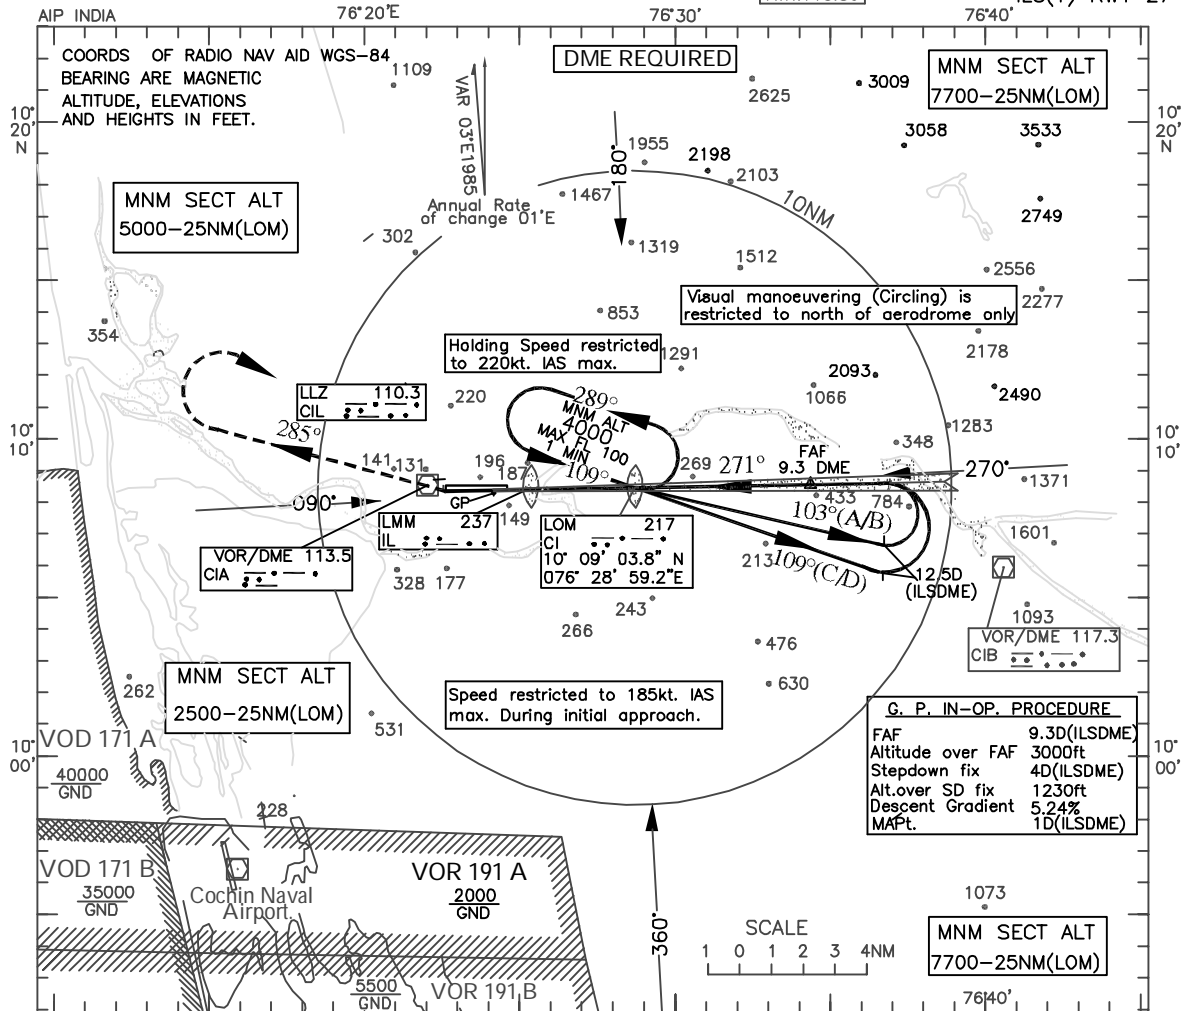

NAUTICAL MILES FROM THR RWY 27

O C A. (H)			Distance (ILSDME) / Altitude information for G.P. in-op. procedure								
CATEGORY OF AIRCRAFT	A/B	C/D	Distance(ILSDME)	9.3D	9 D	8D	7D	6D	5D	4D	3D
STRAIGHT-IN	300 (270)	320 (290)	Altitude (ft.)	3000	2900	2580	2260	1950	1630	1310	990
VISUAL CIRCLING	690 (660)	730 (700)	Distance from FAF to MAPt 8.3 NM								
G.P. IN-OPERATIVE PROCEDURE			Rate of Descent / Ground speed Information for GP in-op. procedure								
STRAIGHT-IN	690 (660)	690 (660)	Ground speed (kt.)			80	100	120	140	160	180
VISUAL CIRCLING	690 (660)	730 (700)	Rate of descent (ft/min)			425	530	635	745	850	955

AERODROME OPERATING MINIMA	CATEGORY A		CATEGORY B		CATEGORY C		CATEGORY D	
	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT
NORMAL MINIMA (ILS)	900 (650)	1300	900 (650)	1300	900 (650)	1300	900 (650)	1300
RESTRICTED MINIMA (ILS)	1200	2000	1200	2000	1000	1800	1000	1800
NORMAL MINIMA (GP INOP)	1600	2400	1600	2400	2800	3600	3200	4000
RESTRICTED MINIMA (GP INOP)	2000	2800	2000	2800	3600	4400	4000	4800
NORMAL CIRCLING MINIMA		3600		3600		4000		4400
RESTRICTED CIRCLING MINIMA		3600		3600		4400		4800

DRG. NO. AAI/16-IALC/2004/19.06.07