



INSTRUMENT APPROACH CHART
 AERODROME ELEV. 337ft. HEIGHTS RELATED TO THR RWY 24-ELEV.308ft
 MANGALORE INDIA ILS RWY 24 (Cat.A/B & C)

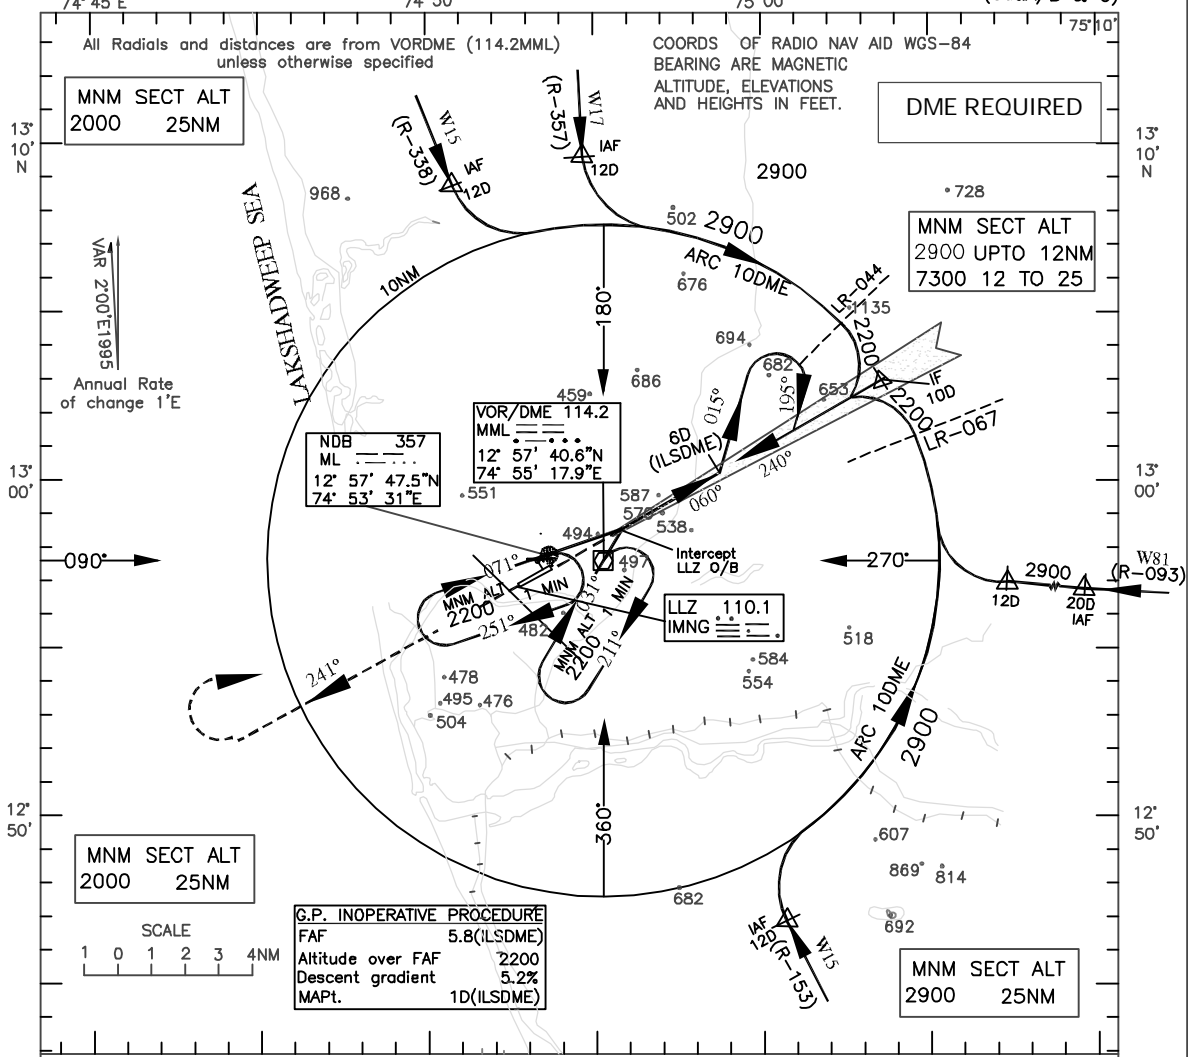

MISSED APPROACH
 Climb straight ahead to 2000ft. then climbing turn RIGHT to VOR/NDB to join holding at 2200 ft. or as instructed by ATC.

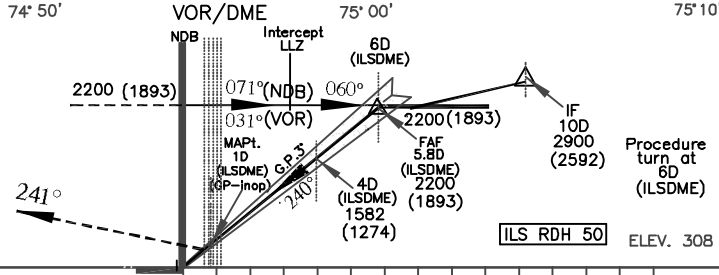

NAUTICAL MILES FROM THR RWY 24		Distance / Altitude information for GP In-op.procedure					
O. C. A. (H)		Distance (NM)					
CATEGORY OF AIRCRAFT	A/B	C	5.8D	5D	4D	3D	2D
STRAIGHT-IN	510	520	2200	1890	1570	1260	940
VISUAL CIRCLING	890	1080	Rate of Descent / Ground speed information for GP In-op.procedure				
G.P.INOPERATIVE PROCEDURE			Ground speed (kt.)				
STRAIGHT-IN	840	840	80	100	120	140	160
VISUAL CIRCLING	890	1080	Rate of descent (ft/min)				
			425	530	635	745	850
AERODROME OPERATING MINIMA	CATEGORY A		CATEGORY B		CATEGORY C		
	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT	
NORMAL MINIMA (ILS)	800	1200	800	1200	800	1200	
RESTRICTED MINIMA (ILS)	1200	1600	1200	1600	900	1300	
NORMAL MINIMA (GP INOP)	2000	2400	2000	2400	2800	3200	
RESTRICTED MINIMA (GP INOP)	2400	2800	2400	2800	3200	3600	
NORMAL CIRCLING MINIMA	3600		3600		4400		
RESTRICTED CIRCLING MINIMA	4000		4000		4800		