


INSTRUMENT  
APPROACH  
CHART

AERODROME ELEV. 52ft.  
HEIGHTS RELATED TO  
THR RWY 25-ELEV.52ft

APP.127.9  
119.5

TWR.118.1

CHENNAI  
INDIA  
ILS RWY 25

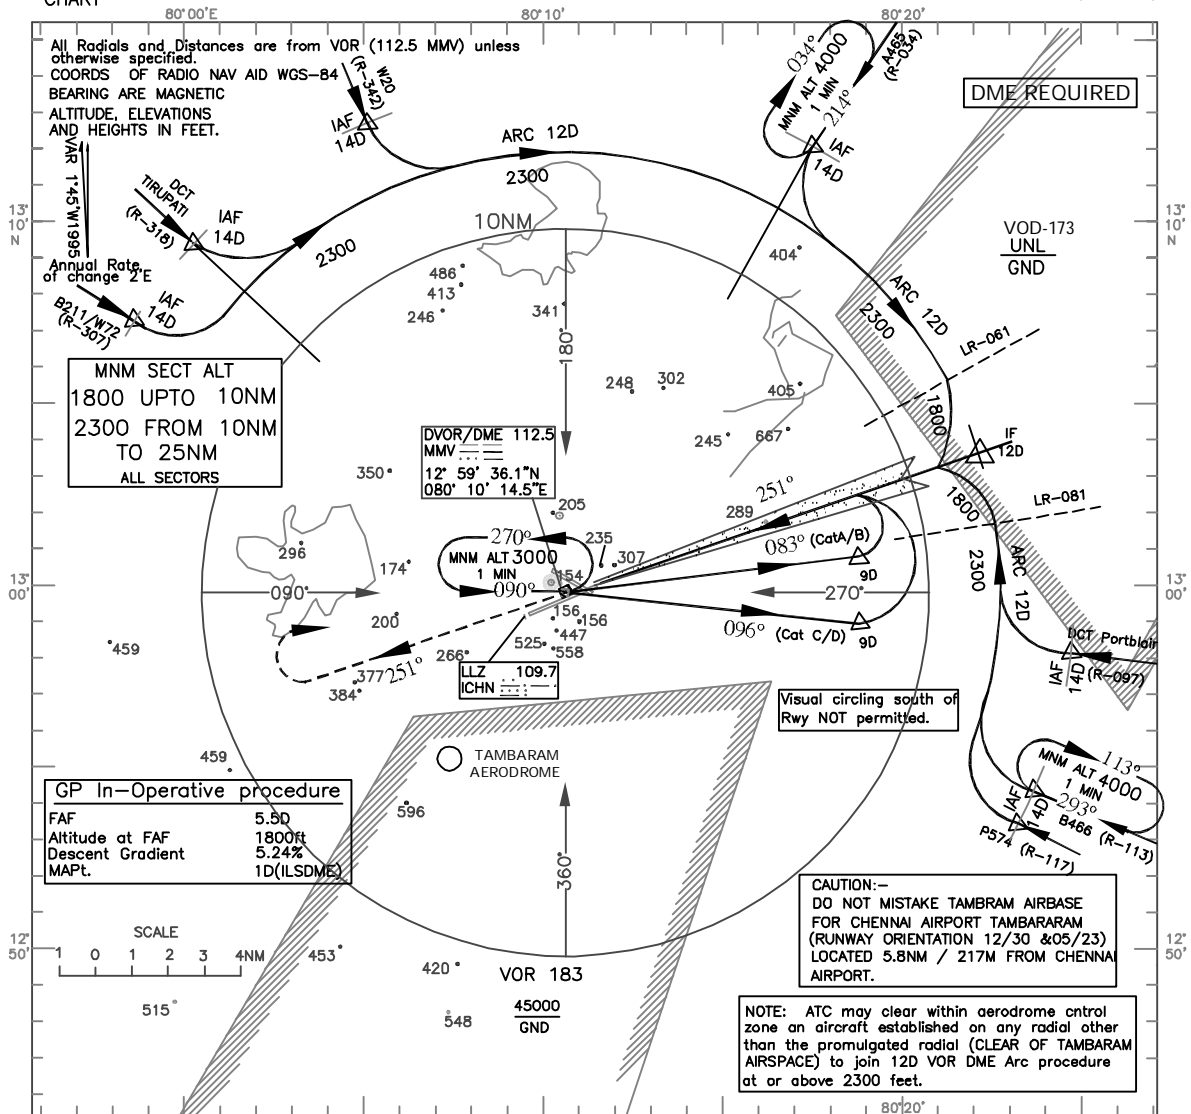


TRANSITION ALTITUDE 4000

**MISSED APPROACH**

Climb straight ahead to 2300ft., then climbing turn RIGHT to VOR (112.5 MMV) to join holding at 3000ft or as instructed by ATC.

ILS RDH 50

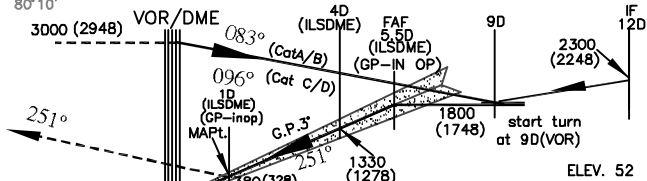

NAUTICAL MILES FROM THR RWY 25

CATEGORY OF AIRCRAFT	O. C. A. (H)		Distance (ILSDME) / Altitude information for G.P.inoperative Procedure					
	A/B	C/D	Distance(NM)	5D	4D	3D	2D	
STRAIGHT-IN	330 (278)	350 (298)	1800	1650	1330	1010	690	
VISUAL CIRCLING	860 (808)	960 (908)	Ground speed & ROD information for G.P.inoperative Procedure					
GP In-Operative procedure			Ground speed (kt.)					
STRAIGHT-IN	610 (558)	610 (558)	80	100	120	140	160	
VISUAL CIRCLING	860 (808)	960 (908)	Rate of descent (ft./min)					
			425	530	635	745	850	
AERODROME OPERATING MINIMA	CATEGORY A		CATEGORY B		CATEGORY C		CATEGORY D	
	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT
NORMAL MINIMA (ILS)	900	1300	900	1300	900	1300	900	1300
RESTRICTED MINIMA (ILS)	1300	1700	1300	1700	1100	1500	1100	1500
NORMAL MINIMA (GP INOP)	2000	2400	2000	2400	2800	3200	3200	3600
RESTRICTED MINIMA (GP INOP)	2400	2800	2400	2800	3200	3600	3600	4400
NORMAL CIRCLING MINIMA		3600		3600		5000		5000
RESTRICTED CIRCLING MINIMA		3600		3600		5000		5000

DRG. NO. AAI/03-IALC/05/ 28.06.06

Cancellation - AIP Supplement 15/2006