



INSTRUMENT  
APPROACH  
CHART

AERODROME ELEV. 52ft.  
HEIGHTS RELATED TO  
THR RWY 25-ELEV.52ft

APP.127.9  
119.5

TWR.118.1

CHENNAI  
INDIA  
ILS RWY 25

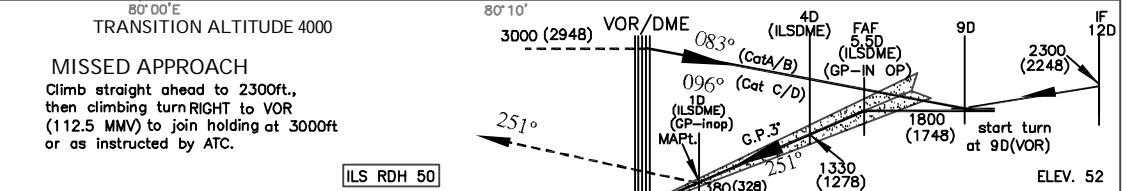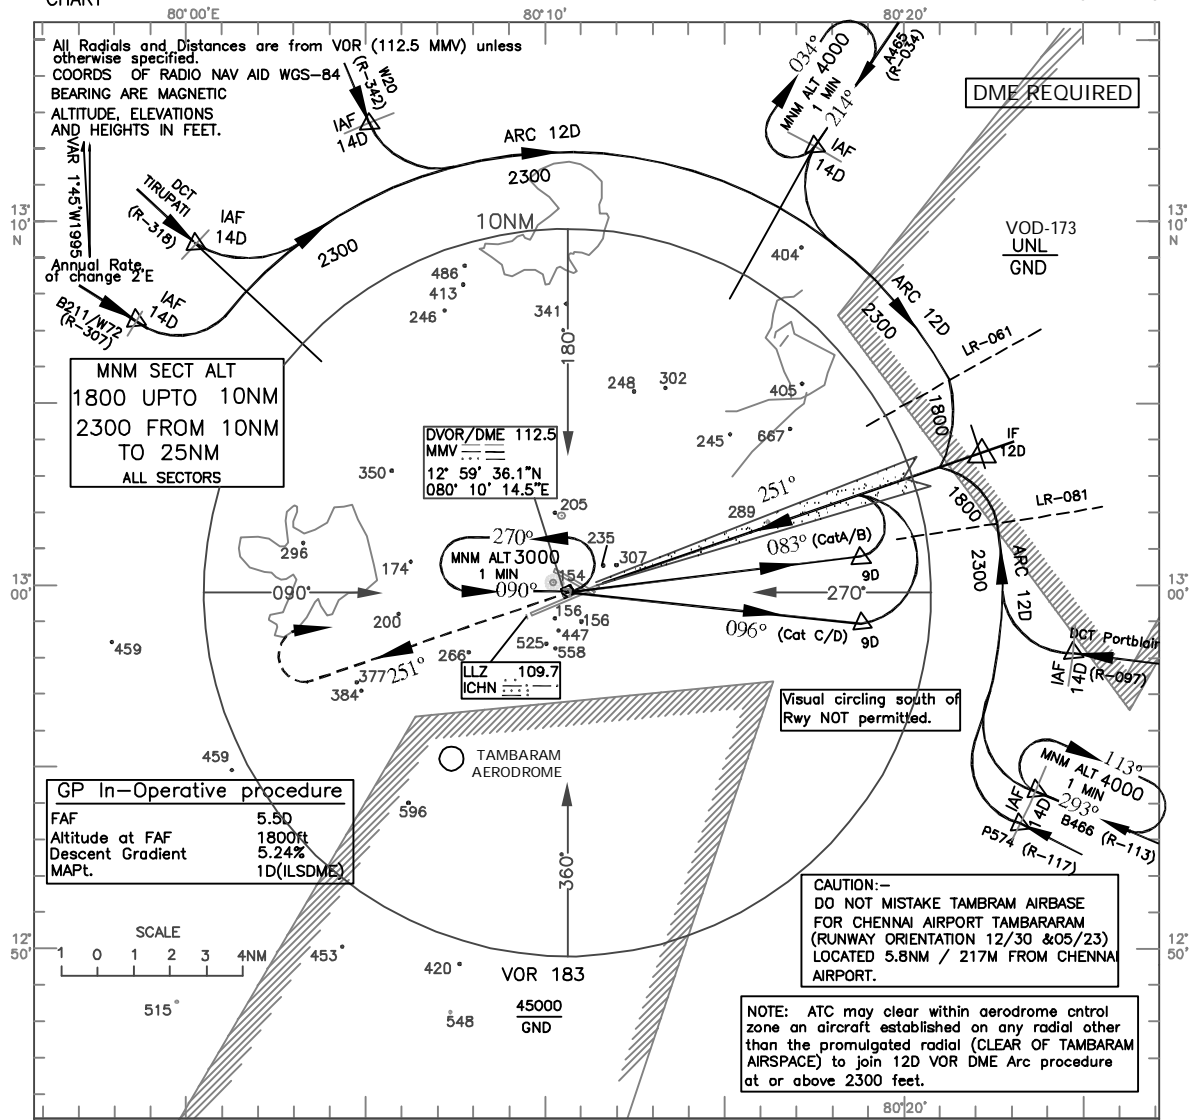

NAUTICAL MILES FROM THR RWY 25		Distance (ILSDME) / Altitude information for G.P.inoperative Procedure							
O. C. A. (H)		Distance(NM) / Altitude(FT.)							
CATEGORY OF AIRCRAFT	A/B	C/D	5.5D	4D	3D	2D			
STRAIGHT-IN	330 (278)	350 (298)	1800	1650	1330	1010	690		
VISUAL CIRCLING	860 (808)	960 (908)	Ground speed & ROD information for G.P.inoperative Procedure						
GP In-operative procedure			Ground speed (kt.)						
STRAIGHT-IN	610 (558)	610 (558)	80	100	120	140	160	180	
VISUAL CIRCLING	860 (808)	960 (908)	Rate of descent (ft./min)						
			425	530	635	745	850	955	
AERODROME OPERATING MINIMA		CATEGORY A		CATEGORY B		CATEGORY C		CATEGORY D	
	ALS	ALS	OUT	ALS	ALS	OUT	ALS	ALS	OUT
NORMAL MINIMA (ILS)	900	1300	900	1300	900	1300	900	1300	1300
RESTRICTED MINIMA (ILS)	1300	1700	1300	1700	1100	1500	1100	1500	1500
NORMAL MINIMA (GP INOP)	2000	2400	2000	2400	2800	3200	3200	3600	3600
RESTRICTED MINIMA (GP INOP)	2400	2800	2400	2800	2800	3200	3600	4400	4400
NORMAL CIRCLING MINIMA		3600		3600		5000		5000	5000
RESTRICTED CIRCLING MINIMA		3600		3600		5000		5000	5000

DRG. NO. AAI/03-IALC/05/ 28.06.06

Cancellation - AIP Supplement 15/2006