
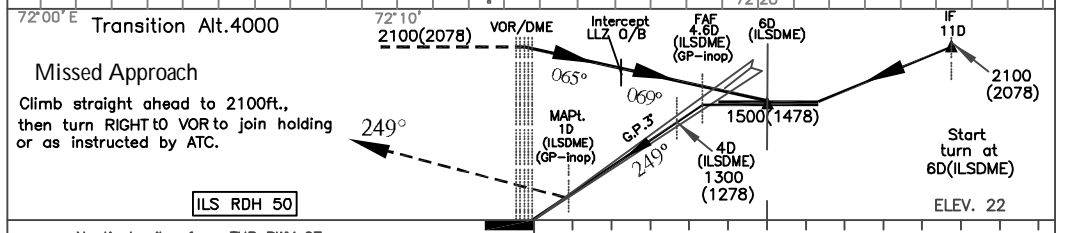


INSTRUMENT APPROACH CHART 72°00'E 72°10' 72°20'

AERODROME ELEV. 44ft. HEIGHTS RELATED TO THR RWY 27 ELEV.22ft

BHAVNAGAR INDIA ILS RWY 25 (Cat.A/B/C)

TWR.120.8

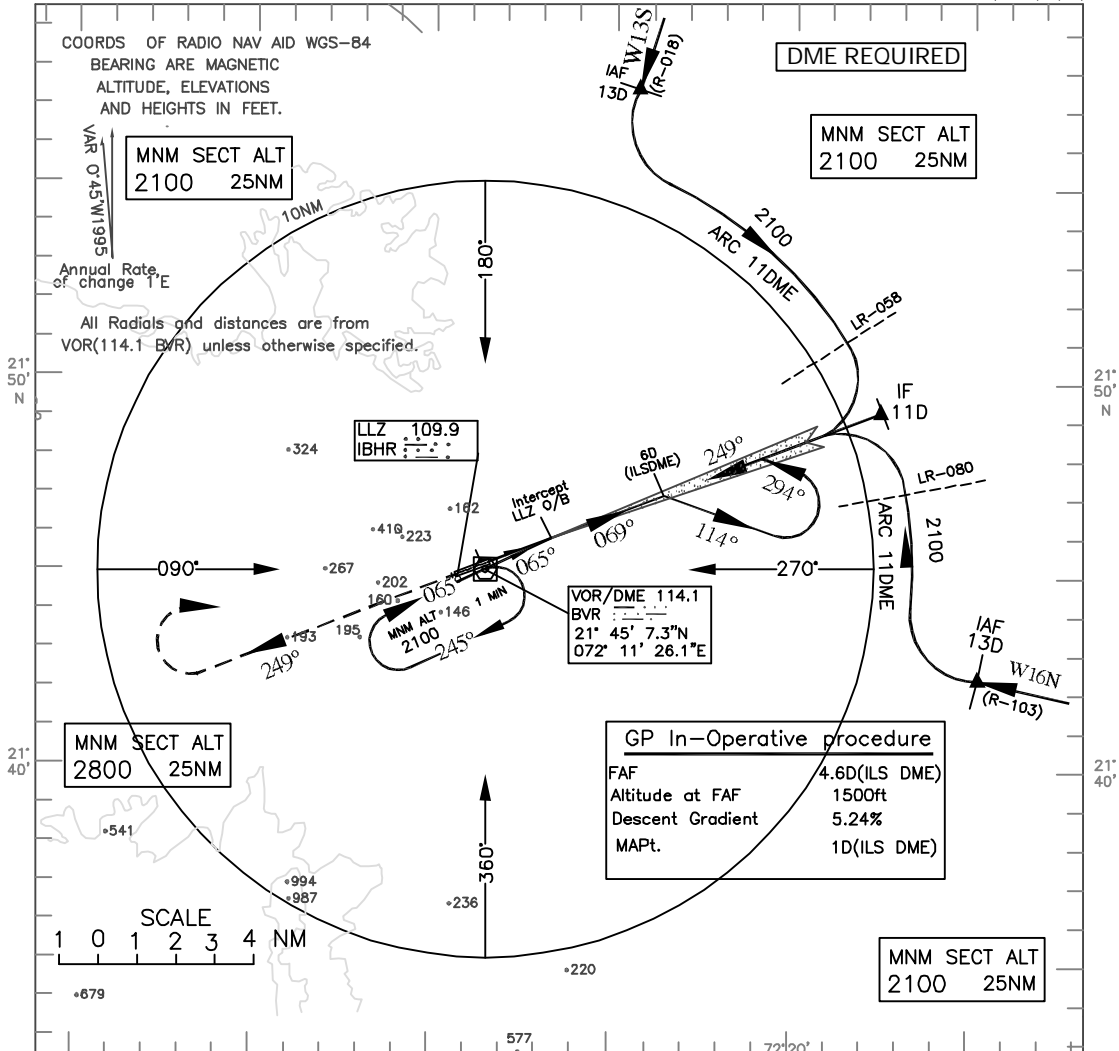

Transition Alt.4000

ILS RDH 50

Nautical miles from THR RWY 27

D. C. A.			Distance (ILSDME) / Altitude information for G.P.inoperative Procedure					
CATEGORY OF AIRCRAFT	A/B	C	Distance(NM)	4.6D	4D	3D	2D	
STRAIGHT-IN	242	242	Altitude(FT.)	1500	1300	980	660	
VISUAL CIRCLING	710	810	Ground speed & Rate of Descent information (G.P.inop)					
GP In-Operative procedure			Ground speed (kt.)	80	100	120	140	160
STRAIGHT-IN	450	450	Rate of descent (ft/min)	420	525	630	735	845
VISUAL CIRCLING	710	810						

AERODROME OPERATING MINIMA	CATEGORY A		CATEGORY B		CATEGORY C	
	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT
NORMAL MINIMA (ILS)		1200		1200		1200
RESTRICTED MINIMA (ILS)		1700		1700		1400
NORMAL MINIMA (GP INOP)		2400		2400		2800
RESTRICTED MINIMA (GP INOP)		2800		2800		3200
NORMAL CIRCLING MINIMA		3600		3600		4400
RESTRICTED CIRCLING MINIMA		3600		3600		4800

DRG. NO. AAI/10 -IALC/06/06.07.07

Cancellation: AIP Supplement no. 30/2006