
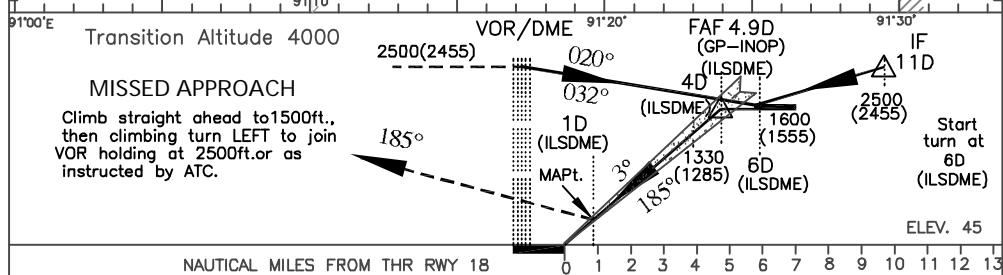


INSTRUMENT APPROACH CHART  
 AERODROME ELEV. 46ft.  
 HEIGHTS RELATED TO THR RWY 18-ELEV.45ft  
 APP.120.4 TWR.118.05  
**AGARTALA** INDIA  
 ILS RWY 18 (Cat.A/B&C)

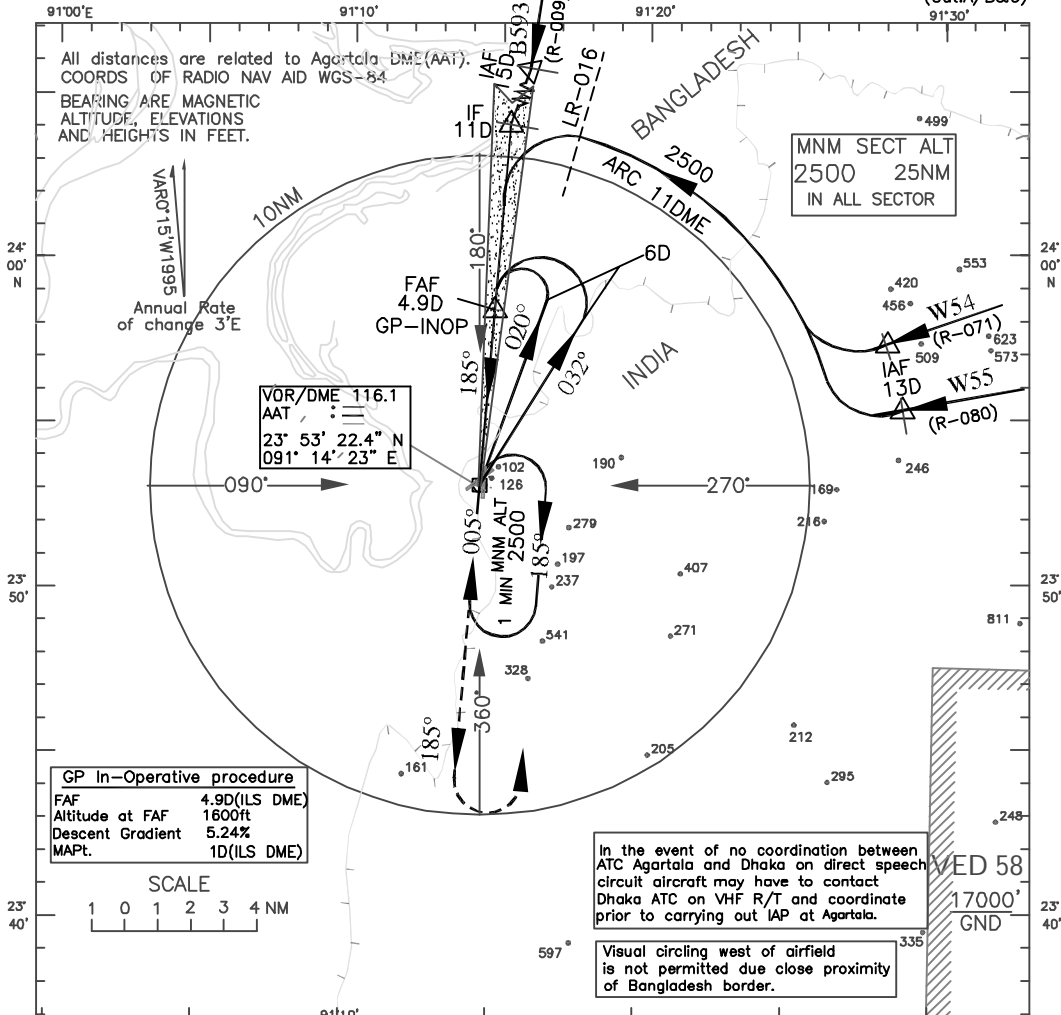

CATEGORY OF AIRCRAFT	O. C. A. (H)		Distance / Altitude information (G.P.In-operative)						
	A/B	C	Distance(NM)	4.9D	4D	3D	2D		
STRAIGHT-IN	280 (235)	280 (235)	Altitude (ft.)	1600	1330	1010	690		
VISUAL CIRCLING	580 (534)	760 (714)	Rate of Descent / Ground speed Information (G.P.In-operative)						
G.P.In-operative procedure			Ground speed (kt.)		80	100	120	140	160
STRAIGHT-IN	450 (404)	450 (404)	Rate of descent (ft/min)		425	530	635	745	850
VISUAL CIRCLING	580 (534)	760 (714)							

AERODROME OPERATING MINIMA	CATEGORY A		CATEGORY B		CATEGORY C	
	ALS	ALS OUT	ALS	ALS OUT	ALS	ALS OUT
STRAIGHT-IN (ILS)						
NORMAL MINIMA		1200		1200		1200
RESTRICTED MINIMA		1800		1800		1300
GP IN-OP NORMAL MINIMA		2400		2400		2800
RESTRICTED MINIMA		2800		2800		3200
NORMAL CIRCLING MINIMA		3600		3600		4000
RESTRICTED CIRCLING MINIMA		3600		3600		4800

DRG. NO. AAI/22-IALC/05/08.07.2007